



40W																	转矩单位换算：(kgf·cm×9.8÷100) =N.m (牛顿·米)						
速比：	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速: rpm (50Hz)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速: rpm (60Hz)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩kgf·cm	7.4	11.8	17.8	22.8	29.4	35.5	41.7	46.8	54	64.8	77.8	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5

型号：5IK40RGU-A(C) T+5GU3-750K

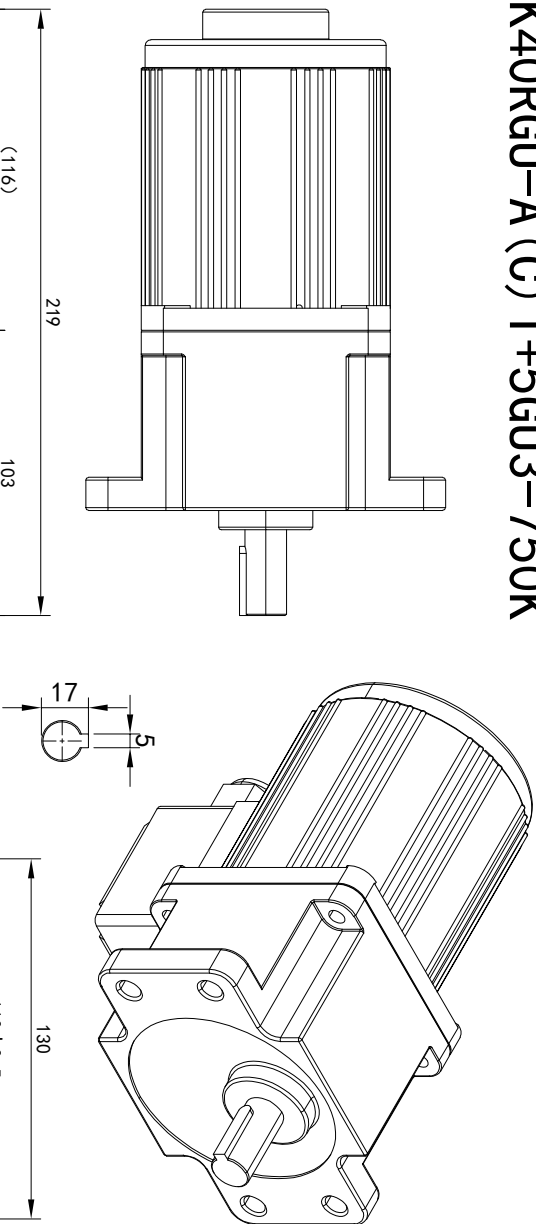

电机参数
功率: 40W
电机额定扭矩: 0.6 -3.2 kg·cm
电压: 单相220V 4P
频率: 50Hz - 60Hz

减速机参数
减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

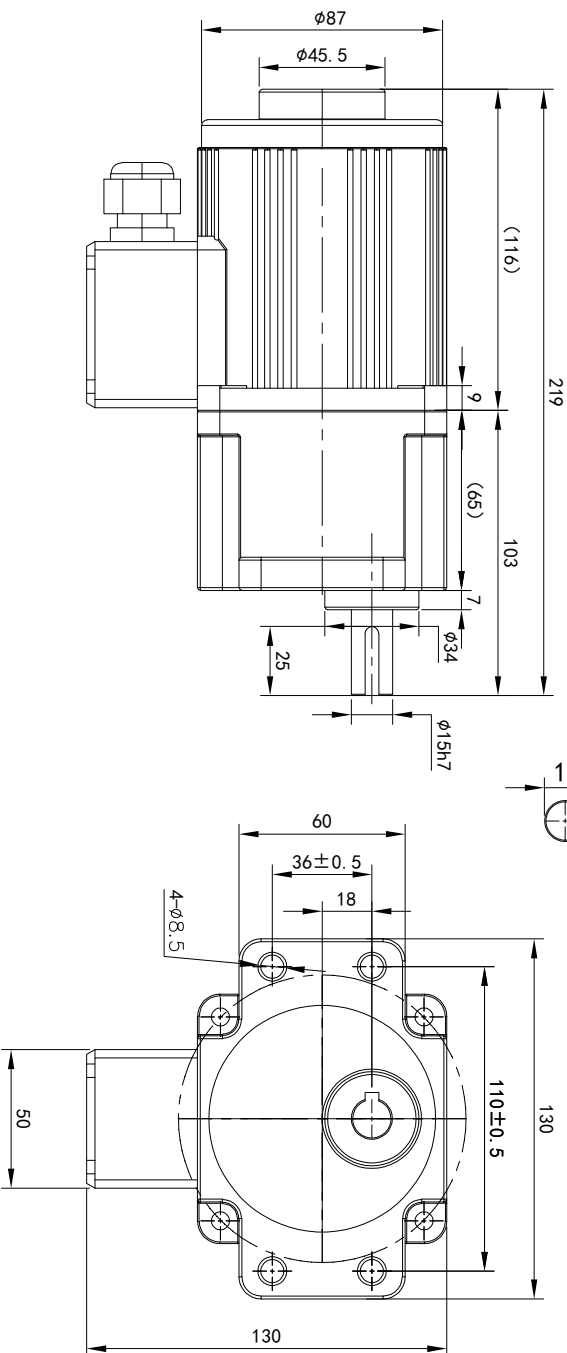

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																									
旧版图号																									
底图总号																									
签字																									
日期																									
AC																									
A 白																									
B 红																									
黑																									
单相马达接线图																									
调速电机需配专用调速器，有多款调速器，该接线图仅供参考																									
L																									
N																									
调速 S2																									
调速 S1																									
副绕组 U2																									
主绕组 U1																									
蓝																									
白																									
红																									
黑																									
AC																									
设计																									
校对																									
审核																									
工艺																									
标记																									
处数																									
分区																									
更改文件号																									
签名																									
年月日																									
选型技术号																									
视图方式																									
重量																									
比例																									
共 1 张 第 1 张																									
A4																									
5IK40RGU-A(C) T+5GU3-750K																									

OPG 浙江欧邦电机有限公司

www.oubang-motor.com 微型感应减速机