
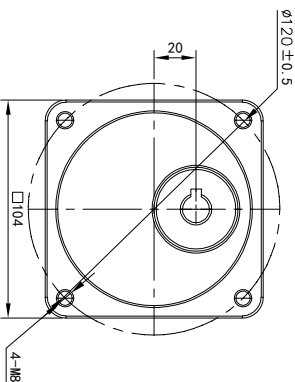
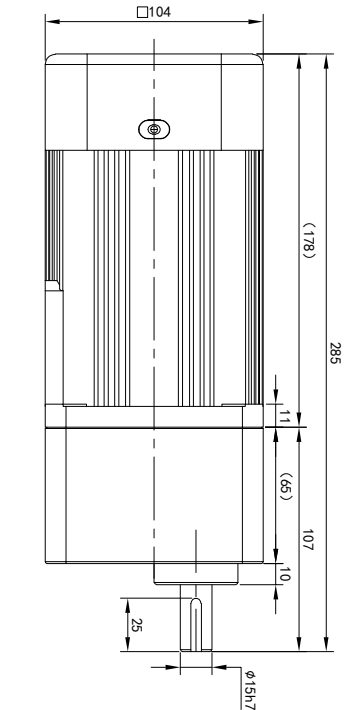

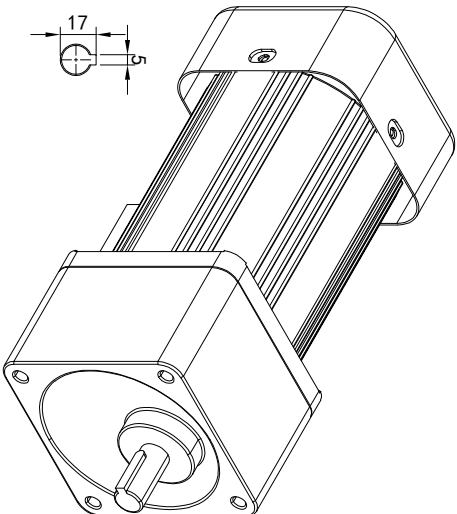


120W																	转矩单位换算：(kgf·cm×9.8÷100)=N.m (牛顿·米)						
速比 i	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速 rpm (60HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速 rpm (60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩 kgf·cm	23	38	57	79	85	102	105	125	143	173	208	249	346	400	400	400	400	400	400	400	400	400	400

型号：6IK120GN-A(C/Y)+6GN3-200K

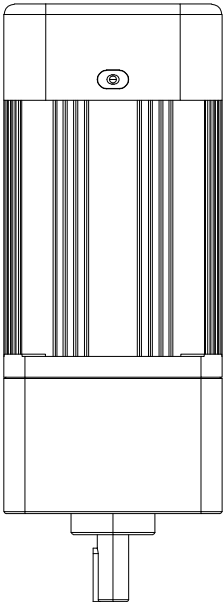

电机参数

功率: 120W
电机额定扭矩: 8.6kg·cm
电压: 单相110/220V 4P
三相220V/380V 4P
频率: 50Hz - 60Hz

减速机参数

减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

请签字 (章) 盖章
Please sign (stamp) to return the bill

备注/附件登记																																								
旧版图号																																								
底图总号																																								
签字																																								
日期																																								
单相马达接线图										三相马达接线图										浙江欧邦电机有限公司																				
AC										Z X Y										www.oubang-motor.com																				
A B 白 红 黑										U V W										微型感应减速机																				
三相220V										三相380V										共 1 张 第 1 张																				
审核										批准										A4																				
工艺																				6IK120GN-A(C/Y)+6GN3-200K																				