
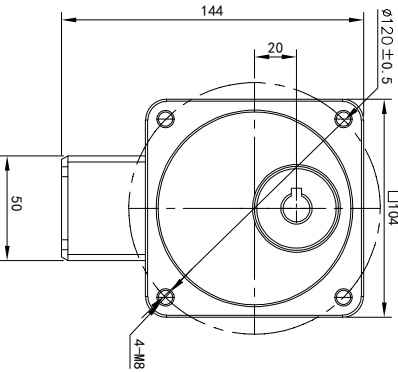
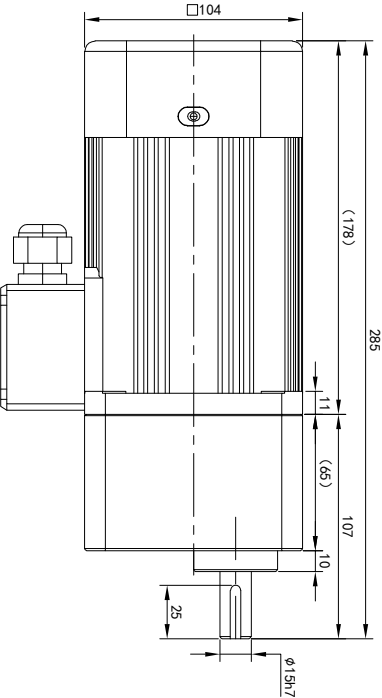

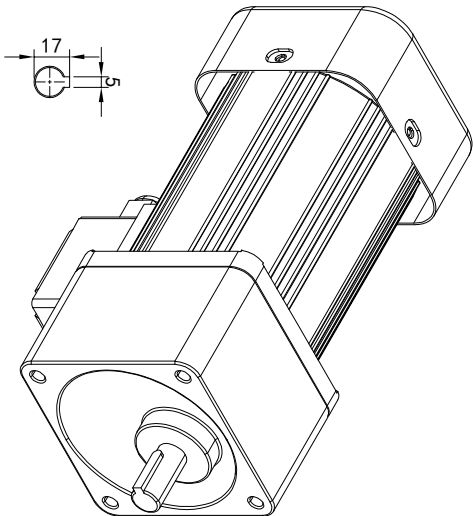


120W																转矩单位换算：(kgf·cm×9.8÷100)=N.m (牛顿·米)							
速比：	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750
转速 rpm (50HZ)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2
转速 rpm (60HZ)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4
转矩 kgf·cm	23	38	57	79	85	102	105	125	143	173	208	249	346	400	400	400	400	400	400	400	400	400	400

型号：6IK120RGN-A (C) T+6GN3-200K

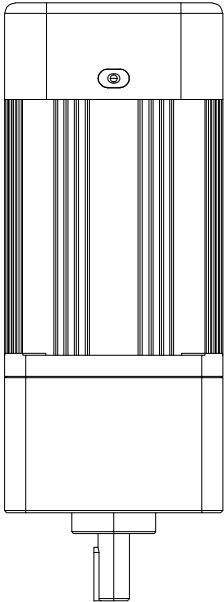

电机参数
功率: 120W
电机额定扭矩: 8.6kg.cm
电压: 单相110/220V 4P
频率: 50Hz – 60Hz

减速机参数
减速比: 参阅上方表格
转速: 参阅上方表格
扭矩: 参阅上方表格

请签字 (章) 图传
Please sign (seal) to return the call

备注/附件登记																																								
旧版图号																																								
底图总号																																								
签字																																								
日期																																								
单相马达接线图										调速电机需配专用调速器，有多款调速器，该接线图仅供参考																														
标记										设计										校对										审核										
处数										分区										更改文件号										签名										
年月日										标准										版本										V1.0										
选型技术号										视图方式										重量										比例										
www.oubang-motor.com										共 1 张 第 1 张										A4										6IK120RGN-A (C) T+6GN3-200K										
浙江欧邦电机有限公司										微型感应减速机																														