



40W																		转矩单位换算：(kgf・cm×9.8÷100)=N.m (牛顿・米)									
速比:	3	5	7.5	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	250	300	500	750				
转速 rpm (50Hz)	500	300	200	150	120	100	83	75	60	50	41	30	25	20	16	15	12.5	10	8.3	6	5	3	2				
转速 rpm (60Hz)	600	360	230	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	7.2	6	3.6	2.4				
转矩 kgf・cm	7.4	11.8	17.8	22.8	29.4	35.5	41.7	46.8	54	64.8	77.8	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5	98.5				

型号：5IK40RGU-A(C) +5GU3-750KB

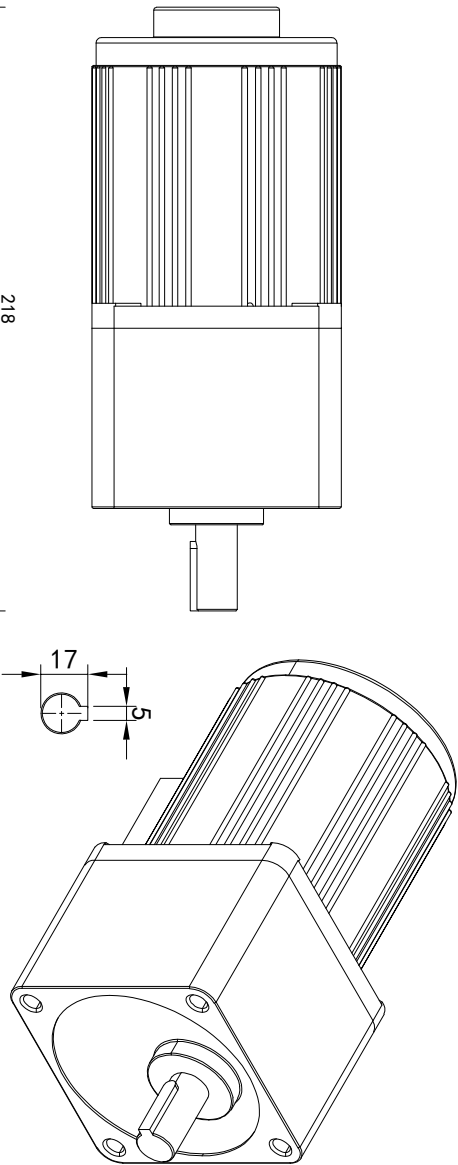

电机参数
功率：40W
电机额定扭矩：0.6 -3.2 kg·cm
电压：单相220V 4P
频率：50Hz - 60Hz

减速机参数
减速比：参阅上方表格
转速：参阅上方表格
扭矩：参阅上方表格

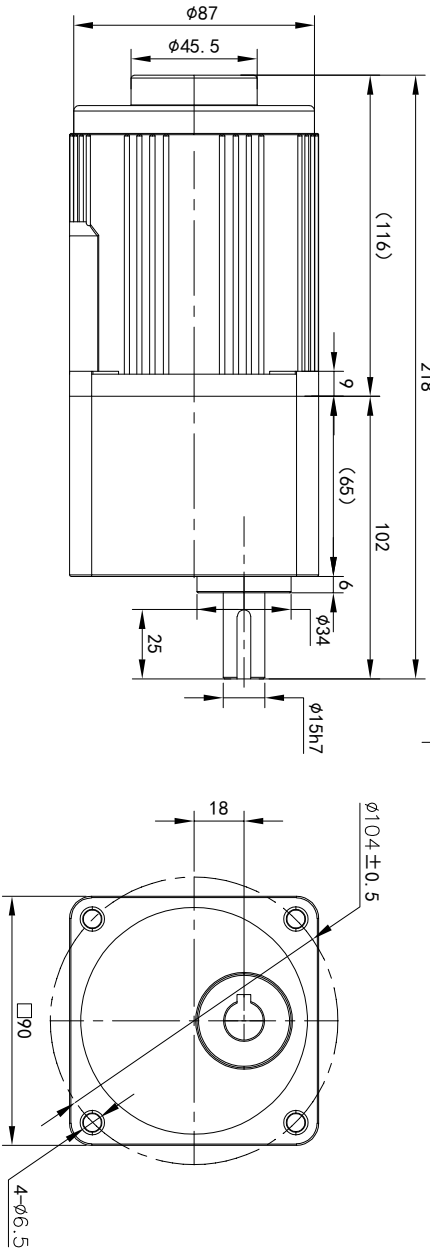

请签字 (章) 回传
Please sign (seal) to return the call

备注/附件登记																																																																																																																		
旧版图号																																																																																																																		
底图总号																																																																																																																		
签字																																																																																																																		
日期																																																																																																																		
单相马达接线图																																																																																																																		
调速电机需配专用调速器，有多款调速器，该接线图仅供参考																																																																																																																		
<table><tr><td>标记</td><td>处数</td><td>分区</td><td>更改文件号</td><td>签名</td><td>年月日</td><td>选型技术号</td><td colspan="2">www.oubang-motor.com</td><td colspan="2">视图方式</td><td>重量</td><td>比例</td><td colspan="6">浙江欧邦电机有限公司</td></tr><tr><td>设计</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="6">微型感应减速机</td></tr><tr><td>校对</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="6"></td></tr><tr><td>审核</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="6"></td></tr><tr><td>工艺</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="6"></td></tr></table>																				标记	处数	分区	更改文件号	签名	年月日	选型技术号	www.oubang-motor.com		视图方式		重量	比例	浙江欧邦电机有限公司						设计													微型感应减速机						校对																			审核																			工艺																		
标记	处数	分区	更改文件号	签名	年月日	选型技术号	www.oubang-motor.com		视图方式		重量	比例	浙江欧邦电机有限公司																																																																																																					
设计													微型感应减速机																																																																																																					
校对																																																																																																																		
审核																																																																																																																		
工艺																																																																																																																		